



Data Sets (No. of Sensors)

Metal Loss	216
Odometer	2

Physical Attributes

Length	65 in (1651 mm)
Weight	1683 lb (763 kg)



Operational

Maximum Pressure	1500 psi (10342 kPa)
Temperature Range	32° to 140°F (0° to 60°C)
¹ Velocity (Preferred)	0.1 to 9 mph (0.04 to 4 m/s)
Minimum Required Diff. Pressure (Launching)	20 psi (138 kPa)
Minimum Required Diff. Pressure (Running)	15 psi (103 kPa)

Pipeline Geometry Requirements

Local Min. Cross Section Diameter	24.00 in (610 mm)
Feature Bore Restriction Diameter	27.00 in (686 mm)
Minimum Bend Radius	1.5D
Minimum Bend Separation (1.5D Bends)	15 in (381 mm)
Minimum Tee Separation (Centerline to Centerline)	75 in (1905 mm)
Maximum Recordable Wall Thickness [[@] 9 mph (4 m/s)]	0.75 in (19 mm)

Reporting


Metal Loss	Refer to Tool Performance Specification
Location Accuracy	
Axial	±1 in (25 mm) within a joint
Circumferential	±10°
Bend Data	
Angle Accuracy	±2°

Suggested Minimum Trap Dimensions (Contact Enduro For Minimum DfL-Combo Trap Dimensions)

Traps	A	B	C	D	E	F	G	H
Launcher	77 in (1956 mm)	33 in (838 mm)	18 in (457 mm)	32 in (813 mm)	78 in (1981 mm)	137 in (3480 mm)	30 in (762 mm)	8 in (203 mm)
Receiver	77 in (1956 mm)	77 in (1956 mm)	18 in (457 mm)	32 in (813 mm)	78 in (1981 mm)	137 in (3480 mm)	30 in (762 mm)	8 in (203 mm)

Notes

- Data quality and run success is dependent on tool speed & line conditions
- Pipelines that are outside of the scope of these specifications can be assessed on an individual basis
- Tool design may vary from image above
- ¹Optional Dynamic Speed Control available
- ²Contact Enduro for details

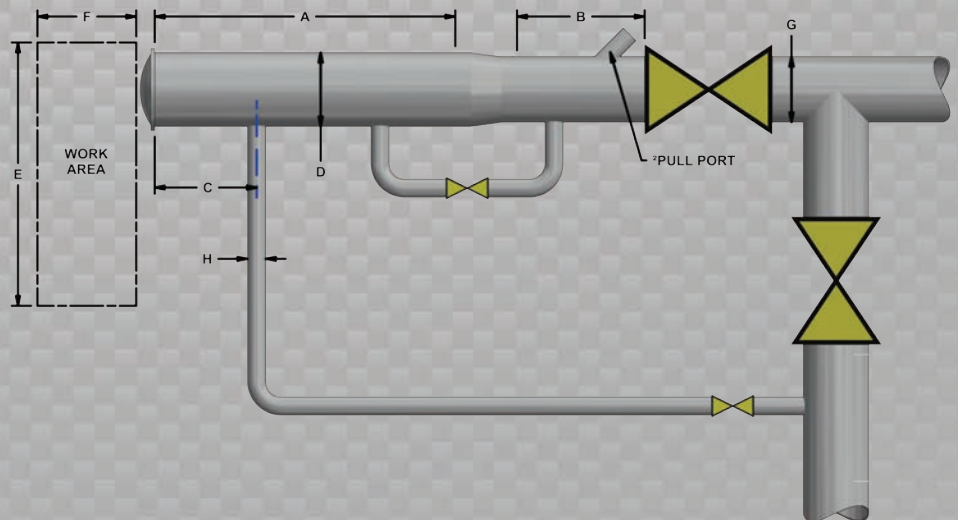

30" DfL