




**Data Sets (No. of Sensors)**

Metal Loss (8")	56
Metal Loss (10")	56
Caliper	28
Odometer	2

**Physical Attributes**

Length	96 in (2438 mm)
Weight	230 lb (104 kg)

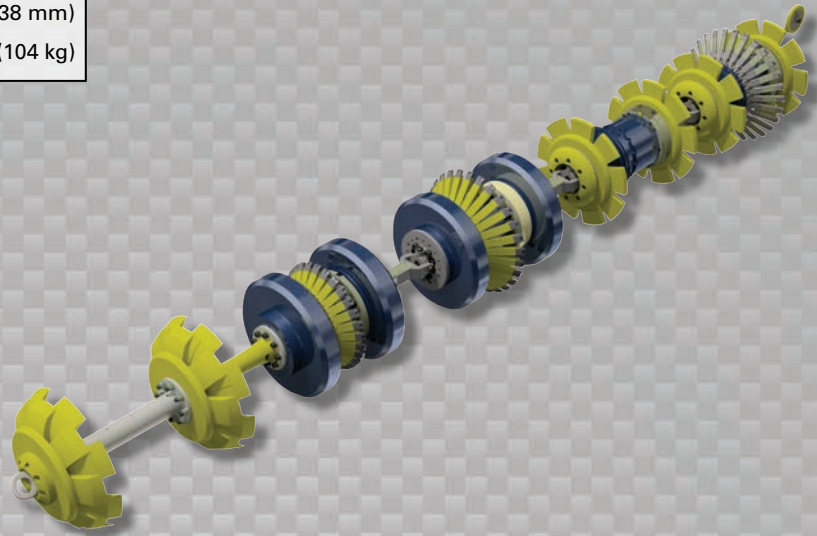

**Operational**

Maximum Pressure	1500 psi (10342 kPa)
Temperature Range	32° to 140°F (0° to 60°C)
Velocity (Preferred)	0.1 to 9 mph (0.04 to 4 m/s)
Minimum Required Diff. Pressure (Launching)	80 psi (552 kPa)
Minimum Required Diff. Pressure (Running)	70 psi (483 kPa)

**Pipeline Geometry Requirements**

Local Min. Cross Section Diameter	6.90 in (175 mm)
Feature Bore Restriction Diameter	7.37 in (187 mm)
Minimum Bend Radius	3D (8"), 1.5D (10")
Minimum Bend Separation (1.5D Bends)	6 in (152 mm)
Minimum Tee Separation (Centerline to Centerline)	30 in (762 mm)
Maximum Recordable Wall Thickness [ @ 9 mph (4 m/s) ]	0.56 in (14 mm)

**Reporting**

<b>Metal Loss</b>	Refer to Tool Performance Specification
<b>Geometry Data</b>	
Reporting Threshold	0.5% of Pipe OD (0.06 in/1.5 mm)
Sizing Accuracy (Depth)	0.06 in (1.5 mm)
<b>Location Accuracy</b>	
Axial	±1 in (25 mm) within a joint
Circumferential	±10°
<b>Bend Data</b>	
Angle Accuracy	±2°

**Suggested Minimum Trap Dimensions**

Traps	A	B	C	D	E	F	G	H
<b>Launcher</b>	108 in (2743 mm)	48 in (1219 mm)	18 in (457 mm)	12 in (305 mm)	58 in (1473 mm)	168 in (4267 mm)	8 in (203 mm)	4 in (102 mm)
<b>Receiver</b>	108 in (2743 mm)	108 in (2743 mm)	18 in (457 mm)	12 in (305 mm)	58 in (1473 mm)	168 in (4267 mm)	8 in (203 mm)	4 in (102 mm)

**Notes**

- Data quality and run success is dependent on tool speed & line conditions
- Pipelines that are outside of the scope of these specifications can be assessed on an individual basis
- Tool design may vary from image above
- <sup>2</sup>Contact Enduro for details

